



Jack Wechat



Jack Sewing Machine Co.,LTD.

JACK SEWING MACHINE CO.,LTD.

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com



High Speed Automatic Overlock Machine




C4

C4

Item: High Speed Automatic Overlock Machine
 Characteristics: Full-automatic; Electronic Device; Oil-proof; Voice Guide

Automatic voice broadcast solution
 Please check whether the connecting line of operation panel and control box is loose. Please try to reset to factory setting or restart machine.

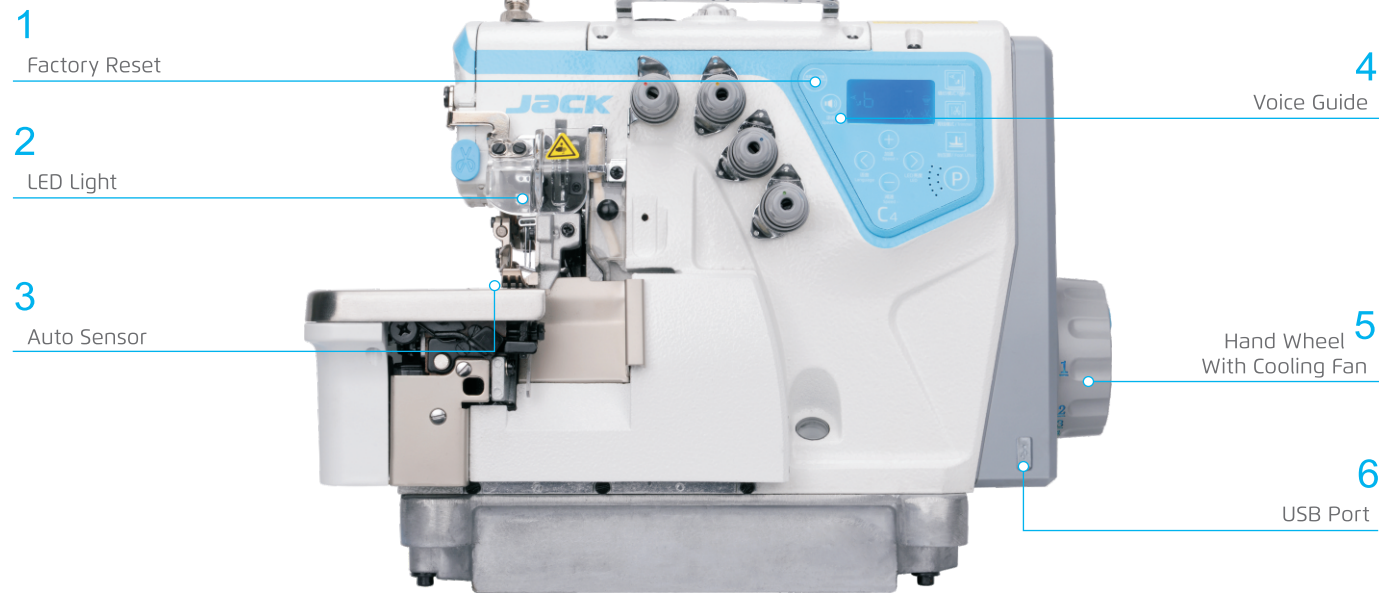

Voice guide, voice alarm and broadcast solution, easy to operate

1 High Efficiency


The max. speed can reach to 7000 r.p.m

The max. speed can reach to 7000 r.p.m, which improves 35%-100% efficiency comparing with normal machine; Factory owner can earn more than 2100 RMB more per month.



2 One Key To Reset

One key back to the user setting or factory setting .

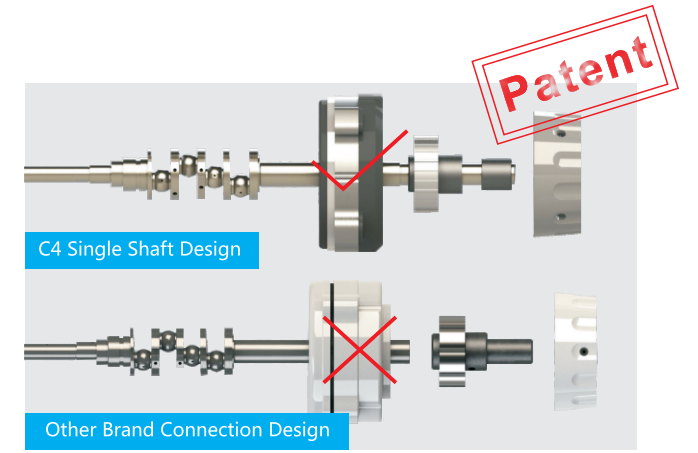

3 Single Shaft Drive, Stable And Fast

Reduce machine torque, making the sewing fast, stable and durable.



4 Intelligent Recognition

The wearproof light sensor recognizes different light and fabric automatically.



5 For Narrow And Wide Edge (C4-4/AD)

Suitable for 6-10mm width without changing needle gauge.

Specification

Model	Functions	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
C4-02x250	Pocket Binding Seaming	DCx27 14#	2	4	5	5	3.8	0.7-2	3.5	7000	525x360x510	33/41
C4-3-02/233	Plain Seaming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-12/233	Bottom Hemming	DCx27 11#	1	3	-	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-3-32R2/223	Narrow Stitch Seaming	DCx27 9#	1	3	-	1.5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-WF-3-02/213	Non-woven Fabric	DCx27 14#	1	3	-	4	8.5	-	5	7000	525x360x510	33/41
C4-4-M03/333	Plain Seaming	DCx27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-4-M03/333/H/M	Heavy Duty	DCx27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x510	33/41
C4-4-M03/333/AD	Adjustable Side Stitch Width	DCx27 11#	2	4	2	4-8	4.6	0.7-2	5.5	7000	525x360x510	33/41
C4-MJ-4-53/233	Towel Ending	DCx27 11#	2	4	2	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-53/233	Strip Attach Seaming	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/233	5x5 Stitch	DCx27 14#	2	5	5	5	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-03/333	3x4 Stitch	DCx27 14#	2	5	3	4	3.8	0.7-2	5	7000	525x360x510	33/41
C4-5-A04/435	Extra Heavy Duty	DCx27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	33/41
C4-6-03/333	Plain Seaming	DCx27 11#	3	6	3x2	4	3.8	0.7-2	5	7000	525x360x510	33/41

Note: H/M: suitable for heavy and medium material. SD device is available (start and end suction device); volume: 525x360x640 (mm), weight 33/44 (kg).